



SINGLE 2 INPUT POSITIVE NAND GATE

Description

The 74LVC240A provides two 4-bit buffers/drivers with separate output-enable $\overline{(OE)}$ inputs. When \overline{OE} is low, the device passes data from the A inputs to the Y outputs. When \overline{OE} is high, the outputs are in the high-impedance state.


The device is designed for operation with a power supply range of 1.65V to 3.6V.

The inputs are tolerant to 5.5V allowing this device to be used in a mixed voltage environment. The device is fully specified for partial power down applications using I_{OFF} . The I_{OFF} circuitry disables the output preventing damaging current backflow when the device is powered down.

Features

- Supply Voltage Range from 1.65V to 3.6V
- Sinks or Sources 24 ma at V_{CC} = 3V
- CMOS Low Power Consumption
- I_{OFF} Supports Partial -Power Down Operation
- Inputs or Outputs Accept up to 5.5V
- Inputs Can Be Driven by 3.3V or 5V Allowing for Mixed Voltage Applications
- Schmitt Trigger Action at All Inputs
- Typical V_{OLP} (Quiet Output Ground Bounce) Less than 0.8V with V_{CC} = 3.3V and T_A = +25°C
- Typical V_{OHV} (Quiet Output dynamic VOH) Greater than 2.0V with V_{CC} = 3.3V and T_A = +25°C
- ESD Protection Tested per JESD 22
 - Exceeds 200-V Machine Model (A115)
 - Exceeds 2000-V Human Body Model (A114)
 - Exceeds 1000-V Charged Device Model (C101)
- Latch-Up Exceeds 250mA per JESD 78, Class I
- All devices are:
 - Totally Lead-Free & Fully RoHS compliant (Notes 1 & 2)
 - Halogen and Antimony Free. "Green" Device (Note 3)

Pin Assignments

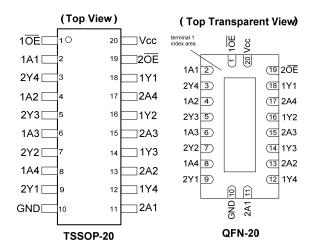

Applications


- General Purpose Logic
- Bus Driving
- Power Down Signal Isolation
- Wide Array of Products Such as:
 - PCs, Notebooks, Netbooks, Ultrabooks
 - Networking Computer Peripherals, Hard Drives, CD/DVD ROM
 - TV, DVD, DVR, Set Top Box

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- 2. See http://www.diodes.com/quality/lead_free.html for more information about Diodes Incorporated's definitions of Halogen and Antimony free, "Green" and Lead-Free.
- 3. Halogen and Antimony free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.



Ordering Information

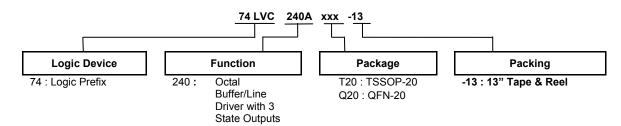

Part Number	Package	Package	Dookono Sino	13" Tape	and Reel
Part Number	Code	(Note 4 & 5)	Package Size	Quantity	Part Number Suffix
74LVC240AT20-13	T20	TSSOP-20	6.4mm X 6.5mm X 1.2mm 0.65 mm lead pitch	2500/Tape & Reel	-13
74LVC240AQ20-13	Q20	V-QFN4525-20	2.5mm X 4.5mm X 0.95mm 0.50 mm lead pitch	2500/Tape & Reel	-13


Notes:

- 4. Pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
- 5. V-QFN4525-20 is a JEDEC recognized naming convention that specifies the package thickness category as V and the number 4525 describes the package as 4.5mm X 2.5mm.

Pin Descriptions

Pin Number	Pin Name	Description
1	10E	Output Enable 1
2	1A1	Data Input
3	2Y4	Data Output
4	1A2	Data Input
5	2Y3	Data Output
6	1A3	Data Input
7	2Y2	Data Output
8	1A4	Data Input
9	2Y1	Data Output
10	GND	Ground
11	2A1	Data Input
12	1Y4	Data Output
13	2A2	Data Input
14	1Y3	Data Output
15	2A3	Data Input
16	1Y2	Data Output
17	2A4	Data Input
18	1Y1	Data Output
19	20E	Output Enable 2
20	Vcc	Supply Voltage

Logic Diagram

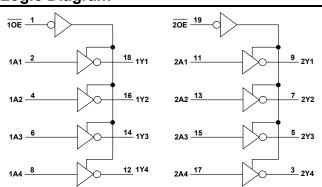

Function Table

i-						
(Each 4-Bit Buffer)						
INPU	INPUTS					
ŌĒ	Α	Y				
L	Н	L				
L	L	Н				
Н	Х	Z				



Absolute Maximum Ratings (Notes 6 & 7)

Symbol	Description	Rating	Unit
ESD HBM	Human Body Model ESD Protection	2	kV
ESD CDM	Charged Device Model ESD Protection	1	kV
ESD MM	Machine Model ESD Protection	200	V
Vcc	Supply Voltage Range	-0.5 to +7.0	V
VI	Input Voltage Range note 3	-0.5 to +7.0	V
I _{IK}	Input Clamp Current V _I < 0V	-20	mA
lok	Output Clamp Current V _O < 0V	-50	mA
lo	Continuous output current - 0.5V < V _O Vcc + 0.5V	±50	mA
Icc	Continuous current through Vcc	100	mA
I _{GND}	Continuous current through GND	-100	mA
T_J	Operating Junction Temperature	-40 to +150	°C
T _{STG}	Storage Temperature	-65 to +150	°C
P _{TOT}	Total Power Dissipation	500	mW

Notes

- 6. Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.
- 7. Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.

Recommended Operating Conditions (Note 8)

Symbol	Parameter	Conditions	Min	Max	Unit	
V	Supply Voltage	Operating		3.6	V	
V _{CC}	Supply Voltage	Data Retention Only	1.5	_	V	
VI	Input Voltage	_	0	5.5	V	
Vo	Output Voltage	_	0	V _{CC}	V	
		V _{CC} = 1.65V	_	-4		
	High Lavel Output Comment	V _{CC} = 2.3V	_	-8	A	
Іон	High-Level Output Current	V _{CC} = 2.7V	_	-12	mA	
			V _{CC} = 3.0V	_	-24	
		V _{CC} = 1.65V	_	4		
	Lave Lavel Output Compant	V _{CC} = 2.3V	_	8	A	
l _{OL}	Low-Level Output Current	V _{CC} = 2.7V	_	12	mA	
		V _{CC} = 3.0V	_	24		
Δt/ΔV	Input Transition Rise or Fall Rate		_	10	ns/V	
T _A	Operating Free-Air Temperature		-40	+125	°C	

Note:

8. Unused inputs should be held at $\ensuremath{V_{\text{CC}}}$ or Ground.



Electrical Characteristics

Symbol	Doromotor	Parameter Test Conditions		V _{CC}	T _A = -40°0	C to +85°C	T _A = -40°C	to +125°C	Unit
Зушьог	Parameter	Test Co	nutions	VCC	Min	Max	Min	Max	Unit
				1.65V to 1.95V	V _{CC} X 0.65	_	V _{CC} X 0.65	_	
V_{IH}	High-Level Input Voltage			2.3V to 2.7V	1.7	_	1.7	_	V
	voltage			3.0V to 3.6V	2	_	2	_	
	l avvil avval immort			1.65V to 1.95V	_	V _{CC} X 0.35	_	V _{CC} X 0.35	
V_{IL}	Low-Level input voltage			2.3V to 2.7V	_	0.7	_	0.7	V
				3.0V to 3.6V	_	0.8	_	8.0	
		I_{OH} = -50 μ A		1.65V to 3.6V	V _{CC} -0.2	_	V _{CC} -0.3	_	
		I_{OH} = -4 mA		1.65V	1.2	_	1.05	_	
V	High-Level	I _{OH} = -8 mA		2.3V	1.7	_	1.65	_	
V_{OH}	Output Voltage	40 4		2.7V	2.2	_	2.05	_	V
		I _{OH} = -12 mA		3.0V	2.4	_	2.48	_	V
		I _{OH} = -24 mA		3.0V	2.3	_	2.0	_	
		$I_{OL} = 100 \mu A$ $I_{OL} = 4 mA$ $I_{OL} = 8 mA$		1.65V to 3.6V	_	0.2	_	0.3	
				1.65V	_	0.45	_	0.65	
V_{OL}	Low-Level Output Voltage			2.3V	_	0.60	_	0.80	V
	Voltage	I _{OL} = 12 mA		2.7V	_	0.40	_	0.60	
		I _{OL} = 24 mA		3.0V	_	0.55	_	0.80	
I _{OFF}	Power Down Leakage Current	V_1 or $V_0 = 0$ o	r 5.5V	0V	_	±10	_	20	μΑ
II	Input Current Control Pins	V _I =GND or 5	.5V	0 to 3.6V	_	±5	_	± 20	μΑ
l _{OZ}	Z-state Current Including Input Current I/O Pins	V _I =GND or 5.5V V _O = 0 to 5.5V		3.6V	_	±5	_	± 20	uA
Icc	Supply Current	V _I = GND or	V _{CC} , I _O =0	3.6V	_	10	_	40	μΑ
ΔI_{CC}	Additional Supply Current	One input at \ lo= 0A	/cc-0.6V	2.7V to 3.6V	_	500	_	5000	μΑ
Ci	Input Capacitance	Control Pins I/O Pins	$V_I = GND \text{ or } V_{CC}$	0V to 3.6V		ypical ypical	4.0 ty 5.5 ty	•	pF

Switching Characteristics

Symbol	Parameter	Test	Test V _{CC}		T _A = +25°0	;	-40°C to	o +85°C	-40°C to	+125°C	Unit
Symbol	raiametei	Conditions	V CC	Min	Тур	Max	Min	Max	Min	Max	Oiiit
			1.8V± 0.15V	1.0	6.0	12.2	1.0	13.1	1.0	16.9	
4	Propagation	Figure 1	2.5V± 0.2V	1.0	3.9	7.8	1.0	8.4	1.0	8.9	no
t _{PD}	Delay A _N to Y _N		2.7V	1.0	4.2	8.1	1.0	8.9	1.0	9.0	ns
			3.3V± 0.3V	1.5	3.8	7.6	1.5	8.1	1.5	8.3	
	Enable Time t _{EN} OE to Y _N		1.8V± 0.15V	1.0	7.0	14.8	1.0	15.3	1.0	22.5	
4		nable Time Figure 1	2.5V± 0.2V	1.0	4.5	10.0	1.0	10.5	1.0	12.4	
ιEN		OE to Y _N		2.7V	1.0	5.4	8.5	1.0	9.5	1.0	11.0
			$3.3 \pm 0.3 V$	1.5	4.4	7.0	1.5	8.5	1.5	9.0	
			1.8V± 0.15V	1.0	7.8	16.5	1.0	17.0	1.0	18.2	
	Disable Time	Figure 1	2.5V± 0.2V	1.0	4.0	9.0	1.0	9.5	1.0	10.7	
^t DIS	t_{DIS} \overline{OE} to Y_N		2.7V	1.0	4.3	7.5	1.0	8.5	1.0	10.0	ns
			3.3V± 0.3V	1.7	4.0	6.0	1.7	7.5	1.7	9.0	
t _{sk(0)}	Output Skew Time		3.3V± 0.3V	_	_	1.0	_	_	_	1.5	ns



Operating Characteristics

 $T_A = +25^{\circ}C$

Symbol	Parameter	Test Conditions	V _{CC}	Тур	Unit
	Dawer Dissipation	C- 10 MH-	1.8V ± 0.15V	9.9	
C_{pd}	C _{pd} Power Dissipation Capacitance per Gate	F= 10 MHz	2.5V ± 0.2V	10.2	pF
	Capacitarios per Cate	Outputs Enabled	$3.3V \pm 0.3V$	10.6	

Package Characteristics


Symbol	Parameter	Package	Test Conditions	Min	Тур	Max	Unit
θ_{JA}	Thermal Resistance Junction-to-Ambient	TSSOP-20	(Note 9)	_	74	_	°C/W
θЈС	Thermal Resistance Junction-to-Case	TSSOP-20	(Note 9)	_	15	_	°C/W
θ_{JA}	Thermal Resistance Junction-to-Ambient	V-QFN4525-20	(Note 9)	_	67	_	°C/W
θ _{JC}	Thermal Resistance Junction-to-Case	V-QFN4525-20	(Note 9)	1	20	_	°C/W

Note:

^{9.} Test conditions for TSSOP-20 and V-QFN4525-20: Devices mounted on 4 layer FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout per JESD 51-7.




Parameter Measurement Information

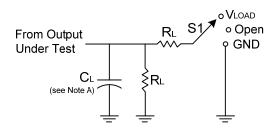


TEST	S1
t _{PLH} /t _{PHL}	Open
t _{PLZ} /t _{PZL}	V_{LOAD}
t _{PHZ} /t _{PZH}	GND


V	In	puts			nputs V				V Δ
V _{CC}	VI	t _r /t _f	V _M	V _{LOAD}	CL	R_L	VΔ		
1.8V±0.15V	V _{CC}	≤2ns	V _{CC} /2	2 x V _{CC}	30pF	1ΚΩ	0.15V		
2.5V±0.2V	V _{CC}	≤2ns	V _{CC} /2	2 x V _{CC}	30pF	500Ω	0.15V		
2.7V	2.7V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V		
3.3V±0.3V	2.7V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V		



Voltage Waveform Pulse Duration

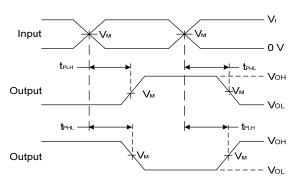

Voltage Waveform Propagation Delay Times Inverting and Non Inverting Outputs

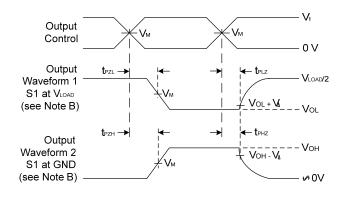

Voltage Waveform Enable and Disable Times Low and High Level Enabling

Notes: A. Includes test lead and test apparatus capacitance.


- B. All pulses are supplied at pulse repetition rate ≤ 10 MHz.
- C. Inputs are measured separately one transition per measurement.
- D. t_{PLZ} and t_{PHZ} are the same as $t_{dis.}$
- E. t_{PZL} and t_{PZH} are the same as t_{EN0} F. t_{PLH} and t_{PHL} are the same as $t_{PD.}$

Figure 1 Load Circuit and Voltage Waveforms




Marking Information

(1) TSSOP20

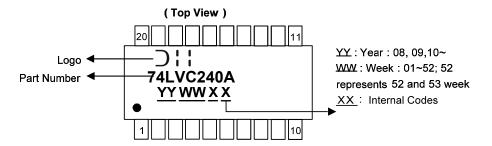

Part Number	Package
74LVC240AT20	TSSOP-20

(2) QFN-20 (V-QFN4525-20)

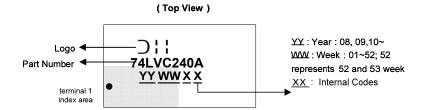


Part Number	Package
74LVC240AQ20	V-QFN4525-20




Package Outline Dimensions (All Dimensions in mm)

Please see AP02002 at http://www.diodes.com/datasheets/ap02002.pdf for the latest version.

(1) TSSOP-20

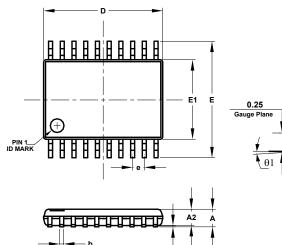



0.05	0.15	-		
0.80	1.05	-		
0.19	0.30	-		
0.09	0.20	-		
6.40	6.60	6.5		
6.20	6.60	6.4		
4.30	4.50	4.4		
0.65 BSC				
0.45 0.75		0.6		
	1.0 REF			
-	8°			
	14°	12		
10°	14°	12		
All Dimensions in mm				
	0.80 0.19 0.09 6.40 6.20 4.30 0.45 0° 10°	0.80 1.05 0.19 0.30 0.09 0.20 6.40 6.60 6.20 6.60 4.30 4.50 0.65 BSC 0.45 0.75 1.0 REF 0° 8° 10° 14°		

Dim

Α

TSSOP-20

Max

1.20

Тур


6.50 6.40 4.40

0.60

12° 12°

Min

(2) QFN-20 (V-QFN4525-20)

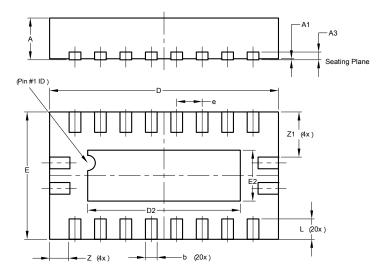


V-QFN4525-20				
Dim	Min	Max	Тур	
Α	0.75	0.85	0.80	
A1	0.00	0.05	0.02	
A3	-	-	0.15	
b	0.18	0.30	0.23	
D	4.45	4.55	4.50	
D2	2.85	3.15	3.00	
Е	2.45	2.55	2.50	
E2	0.85	1.15	1.00	
е	0.50BSC			
L	0.30	0.50	0.40	
Z	-	-	0.385	
Z1	-	-	0.885	
All Dimensions in mm				



Suggested Pad Layout


Please see AP02001 at http://www.diodes.com/datasheets/ap02001.pdf for the latest version.

(1) TSSOP-20

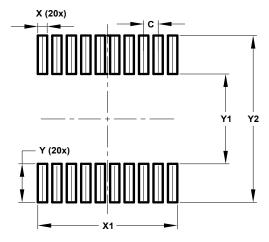

Dimensions	Value (in mm)
С	0.650
Х	0.420
X1	6.270
Υ	1.789
Y1	4.160
Y2	7.720

(2) QFN-20 (V-QFN4525-20)

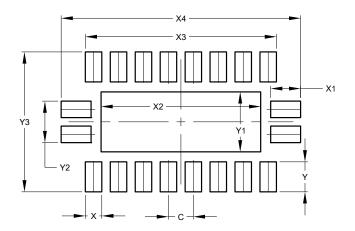

Dimensions	Value (in mm)
С	0.500
X	0.330
X1	0.600
X2	3.200
Х3	3.830
X4	4.800
Y	0.600
Y1	1.200
Y2	0.830
V3	2 800



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com